



OTA-190S 小川製作所

定格荷重 (t) 2.7
 作業半径 (m) 42
 最大揚程 (m) 200

■主要寸法図 (単位: mm)

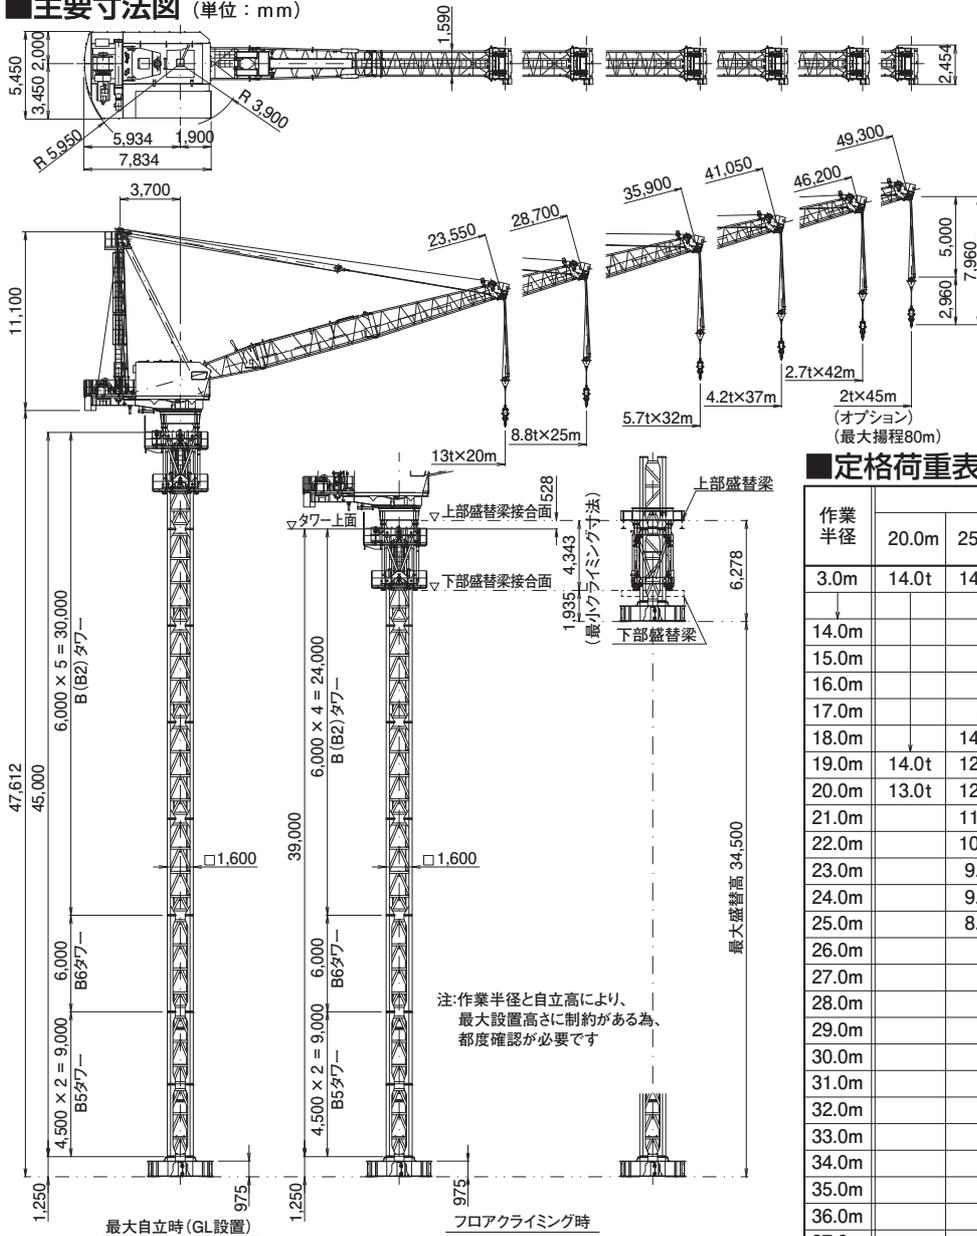

※下記平面図は、上記図の倍尺とする

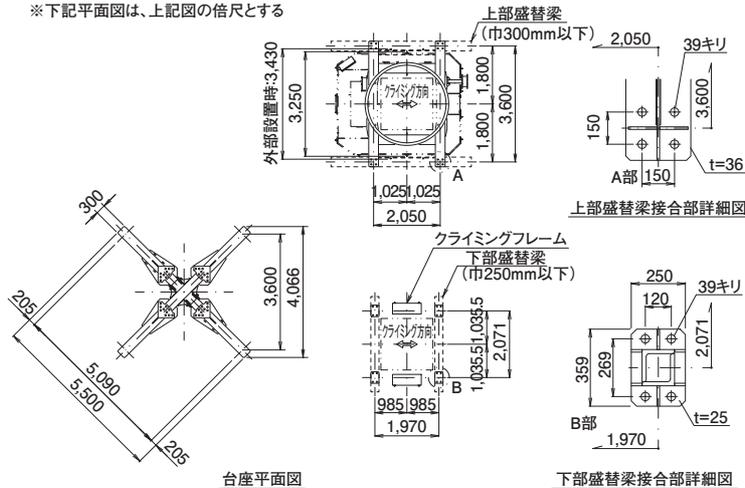

■揚程

R20m	R25m	R32m	R37m	R42m	R45m
200m	200m	200m	150m	100m	80m

■定格荷重表

作業半径	最大作業半径					
	20.0m	25.0m	32.0m	37.0m	42.0m	45.0m (オプション)
3.0m	14.0t	14.0t	14.0t	14.0t	10.0t	8.0t
4.0m						8.0t
5.0m						8.0t
6.0m						8.0t
7.0m						8.0t
8.0m						8.0t
9.0m						8.0t
10.0m						8.0t
11.0m						8.0t
12.0m						8.0t
13.0m						8.0t
14.0m						8.0t
15.0m						8.0t
16.0m						8.0t
17.0m						8.0t
18.0m						8.0t
19.0m						8.0t
20.0m						8.0t
21.0m						8.0t
22.0m						8.0t
23.0m						8.0t
24.0m						8.0t
25.0m						8.0t
26.0m						8.0t
27.0m						8.0t
28.0m						8.0t
29.0m						8.0t
30.0m						8.0t
31.0m						8.0t
32.0m						8.0t
33.0m						8.0t
34.0m						8.0t
35.0m						8.0t
36.0m						8.0t
37.0m						8.0t
38.0m						8.0t
39.0m						8.0t
40.0m						8.0t
41.0m						8.0t
42.0m						8.0t
43.0m						8.0t
44.0m						8.0t
45.0m						8.0t

■仕様

速度	巻上	2.5~14 t	115~31 m/min
	起伏	120 sec	
電動機	旋回	0.49 rpm	
	昇降	0.5(0.6) m/min	
安全装置	巻上	90KW 4P 60%ED インバータ制御	
	起伏	22KW 4P 75%ED インバータ制御	
	旋回	9.75KW 4P 25%ED インバータ制御	
電源	昇降	15KW 4P CONT	
電源		400(440)V 50(60)Hz	
安全装置		巻過防止装置・過負荷防止装置 起伏制限装置・作業半径規制装置	

()内数値は、60Hzを示す。