


■主要寸法図 (単位: mm)

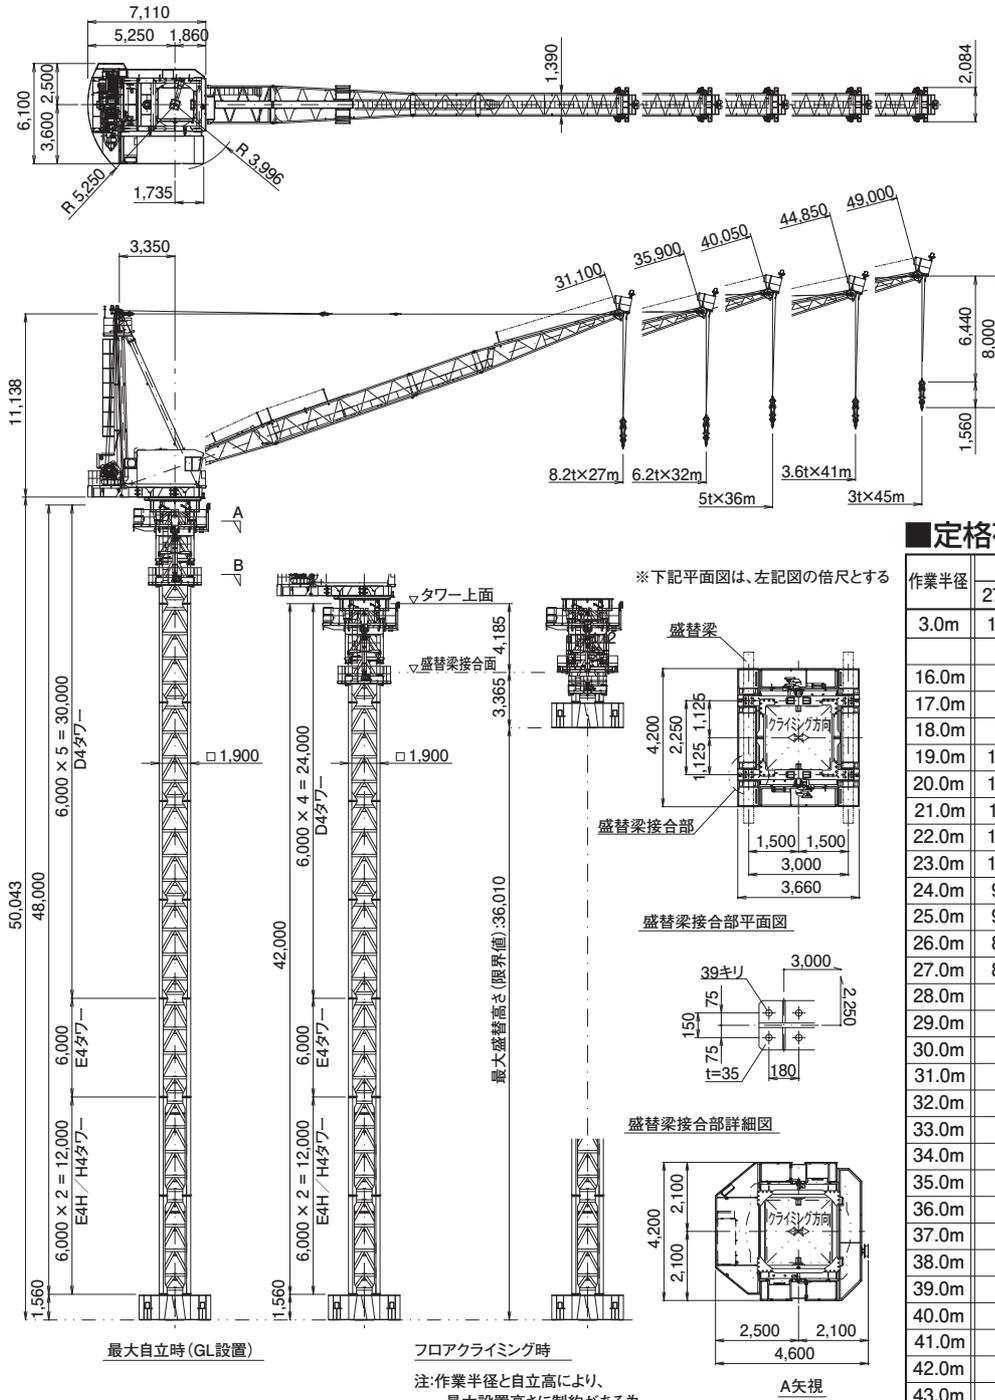

■定格荷重表

作業半径	最大作業半径				
	27.0m	32.0m	36.0m	41.0m	45.0m
3.0m	13.0t	13.0t	13.0t	10.0t	8.0t
16.0m			13.0t		8.0t
17.0m			12.3t		7.7t
18.0m		13.0t	11.7t		7.4t
19.0m	13.0t	12.3t	11.2t	10.0t	7.1t
20.0m	12.3t	11.6t	10.6t	9.6t	6.9t
21.0m	11.6t	11.0t	10.1t	9.1t	6.6t
22.0m	10.9t	10.4t	9.6t	8.7t	6.4t
23.0m	10.3t	9.9t	9.1t	8.4t	6.1t
24.0m	9.7t	9.3t	8.7t	8.0t	5.9t
25.0m	9.2t	8.8t	8.3t	7.6t	5.7t
26.0m	8.7t	8.4t	7.9t	7.3t	5.5t
27.0m	8.2t	7.9t	7.5t	6.9t	5.2t
28.0m		7.5t	7.1t	6.6t	5.0t
29.0m		7.2t	6.8t	6.3t	4.9t
30.0m		6.8t	6.5t	6.0t	4.7t
31.0m		6.5t	6.2t	5.7t	4.5t
32.0m		6.2t	5.9t	5.4t	4.3t
33.0m			5.7t	5.2t	4.2t
34.0m			5.4t	4.9t	4.0t
35.0m			5.2t	4.7t	3.9t
36.0m			5.0t	4.5t	3.7t
37.0m				4.3t	3.6t
38.0m				4.1t	3.5t
39.0m				3.9t	3.4t
40.0m				3.8t	3.4t
41.0m				3.6t	3.3t
42.0m					3.2t
43.0m					3.1t
44.0m					3.1t
45.0m					3.0t

■仕様

巻上	1.4~13 t	82~22 m/min
速度	起伏	80~85 sec
	旋回	0.44 rpm
	昇降	0.60 (0.72) m/min
電動機	巻上	55.0KW 4P 40%ED インバータ制御
	起伏	34.5KW 4P 40%ED インバータ制御
	旋回	11.0KW 4P 75%ED インバータ制御
	昇降	15.0KW 4P CONT
電源	400 (440) V 50 (60) Hz	
安全装置	巻過防止装置・過負荷防止装置 起伏制限装置・作業半径規制装置	

■揚程

R27m	R32m	R36m	R41m	R45m
163m	158m	155m	150m	100m

( )内数値は、60Hzを示す。