

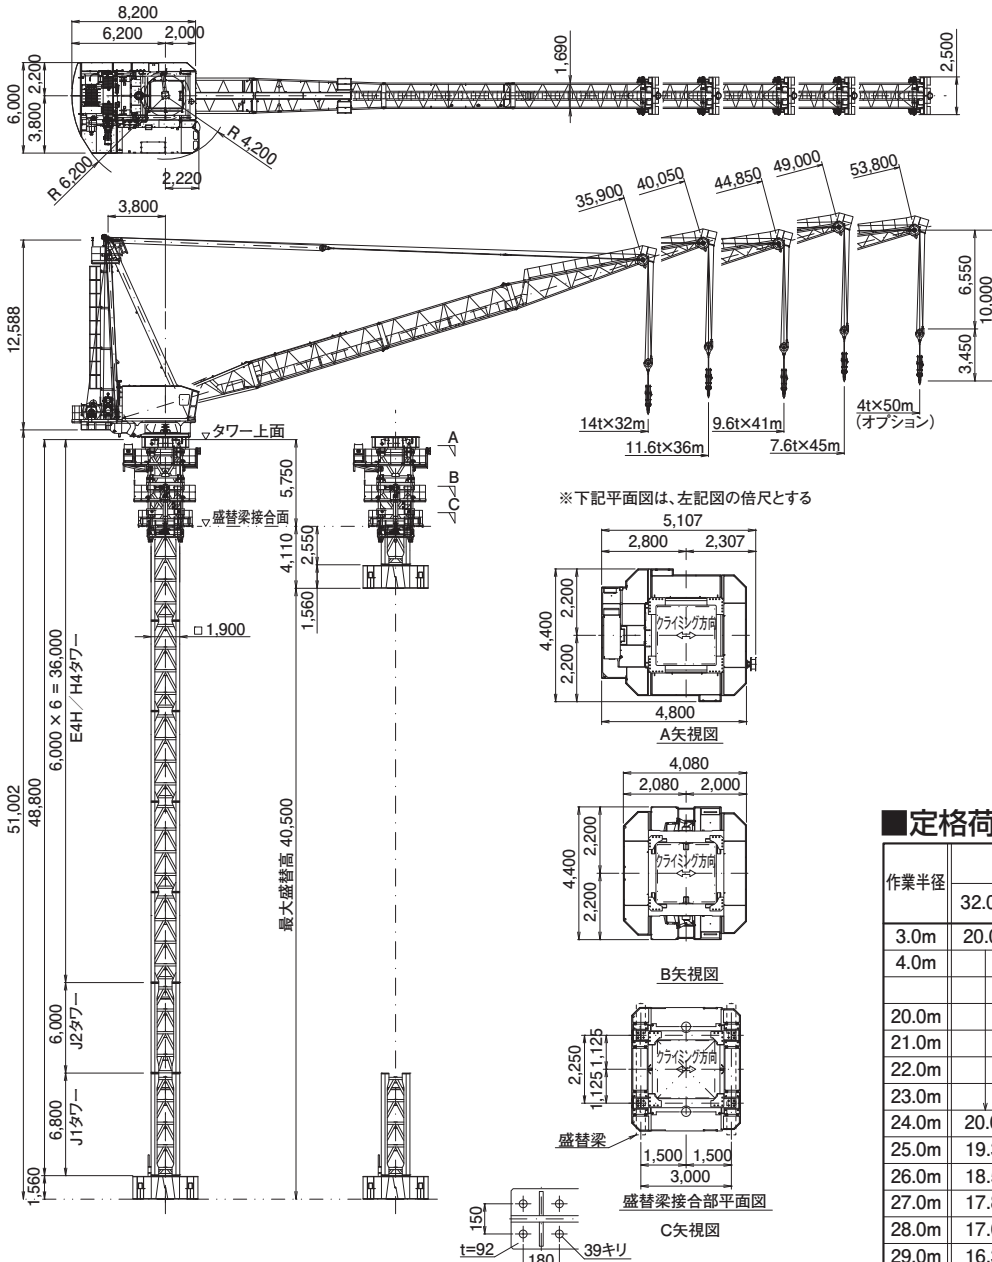


■主要寸法図 (単位: mm)



※下記平面図は、上記図の倍尺とする



盛替梁接合部詳細図

■揚程

R32m	R36m	R41m	R45m	R50m
258m	255m	250m	150m	70m

■仕様

速度	巻上	20~2.7 t	28~128 m/min
	起伏	103~107 sec	
	旋回	0.44 rpm	
電動機	昇降	0.55(0.66) m/min	
	巻上	110KW 4P 60%ED	インバータ制御
	起伏	39KW 4P 25%ED	インバータ制御
電源	旋回	19.5KW 4P 25%ED	インバータ制御
	昇降	22KW 4P CONT	
安全装置	400(440)V 50(60)Hz		
安全装置	巻過防止装置・過負荷防止装置		
	起伏制限装置・作業半径規制装置		
	()内数値は、60Hzを示す。		

■定格荷重表

作業半径	最大作業半径				
	32.0m	36.0m	41.0m	45.0m	50.0m (オプション)
3.0m	20.0t	20.0t	20.0t	14.5t	10.0t
4.0m				16.0t	
20.0m				16.0t	10.0t
21.0m				15.3t	9.6 t
22.0m			20.0t	14.7t	9.2 t
23.0m		20.0t	19.1t	14.1t	8.8 t
24.0m	20.0t	19.3t	18.3t	13.5t	8.5 t
25.0m	19.3t	18.5t	17.5t	13.0t	8.1 t
26.0m	18.5t	17.7t	16.7t	12.5t	7.8 t
27.0m	17.8t	16.9t	16.0t	12.0t	7.5 t
28.0m	17.0t	16.0t	15.3t	11.6t	7.2 t
29.0m	16.3t	15.4t	14.7t	11.2t	7.0 t
30.0m	15.5t	14.8t	14.1t	10.8t	6.7 t
31.0m	14.8t	14.3t	13.5t	10.4t	6.5 t
32.0m	14.0t	13.7t	13.0t	10.0t	6.2 t
33.0m		13.2t	12.5t	9.7 t	6.0 t
34.0m		12.6t	12.0t	9.4 t	5.7 t
35.0m		12.1t	11.7t	9.1 t	5.4 t
36.0m		11.6t	11.3t	8.9 t	5.2 t
37.0m			11.0t	8.7 t	5.0 t
38.0m			10.7t	8.5 t	4.8 t
39.0m			10.3t	8.3 t	4.7 t
40.0m			10.0t	8.2 t	4.6 t
41.0m			9.6 t	8.1 t	4.5 t
42.0m				7.9 t	4.4 t
43.0m				7.8 t	4.3 t
44.0m				7.7 t	4.3 t
45.0m				7.6 t	4.2 t
46.0m					4.2 t
47.0m					4.1 t
48.0m					4.1 t
49.0m					4.0 t
50.0m					4.0 t